


### Description :

The wiring adapter module type ADP-SUBD37M/SUBD37M allows you to connect and disconnect easily using a standard cable, a FIRELEC interface unit located in a remote cabinet, to a 16 or 32 channel I/O card located in a system cabinet.

The module ADP-SUBD37M/SUBD37M must be installed near or inside the system cabinet (in the rear side for example) ,and has to be connected using a round cable either to the screw terminals or a "40 pin mass termination block" of a 16 or 32 channel card.

The connection between the system cabinet and the marshalling cabinet is easy to do and easy to remove using a cable with a SubDF 37 pin connector at both ends

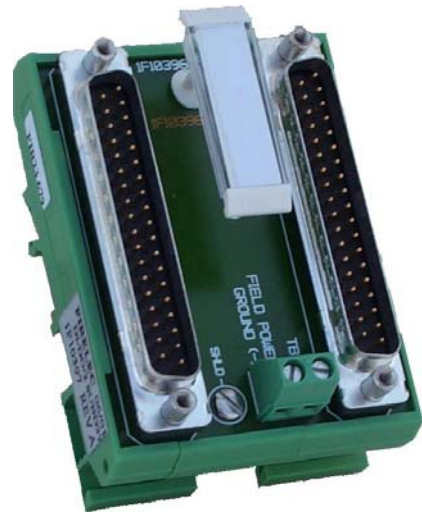

### Specifications :

#### **Dimensions :**

H : 80mm , L : 55mm , P : 55mm

#### **Weight :**

<100 g

#### **Mounting :**

Asymmetric or Symmetric DIN rail

#### **Withstanding voltage rating:**

250V rms between non connected signal

#### **Connection to the 16 or 32 channel card :**

Via a Sub-D 37 pins male connector with UNC 4-40 female lock.

#### **Connection to the remote cabinet :**

Via a Sub-D 37 pins male connector with UNC 4-40 female lock .

